


Verlegeanleitung



megaloc aqua protect ohne integrierte Trittschalldämmung (Fliesenformat)

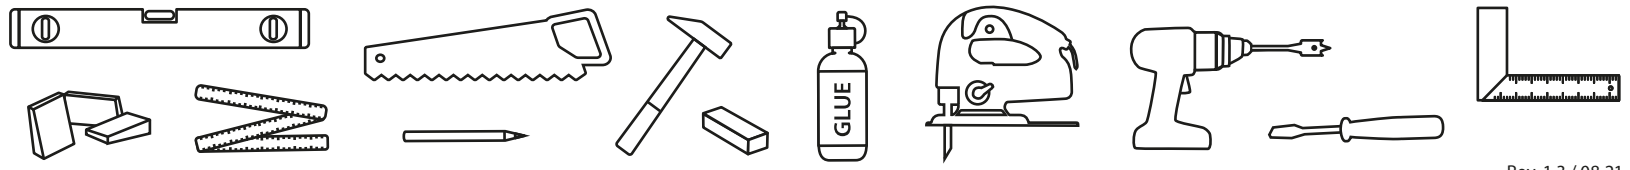

Rev. 1.3 / 08.21

1 rel. hum. 40-60%
temp. >18°C/64°F 48 h
≥ 30 cm
12 in

2 CA 0,3 CM % CT 1,8 CM %

3

4

5

6 max. 2 mm / 1 m
5/64 in / 3 ft

7 max. 3 mm, 1/8 in
0,2 mm PE

8 2 cm
2 3/32 in
PE 20 cm
7 7/8 in

9 x=10 mm
3/8 in

10 max. 29°C
84°F

11

12

13 rel. hum. 40-60%
temp. >18°C/64°F

14

15 > 15 cm
6 in > 15 cm
6 in
11 m
36 ft x=10 mm
3/8 in

16

17 1
2
3
△ 20-30°

18 1 2 3

19

20

21 > 20 cm
7 7/8 in

22 ø +20 mm
3/4 in

23 ø +20 mm
3/4 in

24 V1 > 15 cm
6 in

25 V1

26 V1

27 2

24 V2 10 mm
3/8 in

25 V2 +10 mm
3/8 in

26 V2 > 15 cm
6 in

27 1 2 3

1: PE foam baker rod / PE Schaum Band,
2: Silicone / Silikon, 3: Molding / Leiste

28

29

30

31

32

33

34

35 1 2 3